

Insulation of coverage

Coverage of wood

Important considerations

Insulation of inverted coverage (under the tile on the concrete slab with wood flooring, under coverage and traditional wood structure) such as in any other insulation, it must obey the rules of installation, so not to compromise the effectiveness of the insulation SPACE REFLEX®. It must comply with the air boxes, so you get the most out of the reflective effect.

It is important the existence of air boxes for perfect ventilation of the plate, so the solution SPACE REFLEX® (double effect of air box) is ideal for the construction of any coverage, thus allowing effective ventilation tiles and the plate. With the application of the lath is constructed an air box ventilation necessary for perfect coverage.

Also in a situation of a broken tile, the water is driven by SPACE REFLEX® insulation to the gutter without being filtered to the plate, however, this serves only for a temporary situation, having to repaired the tile as soon as possible.

1
Support.

2
Set the insulation from the bottom up in the horizontal.

3
To maintain the continuity of the product, add rolls overlapped with distances of 10 cm and sealed with aluminum tape.


4
Place the laths to shingles.

5
Apply the tiles.



Insulation of coverage

Coverage of wood on the inside

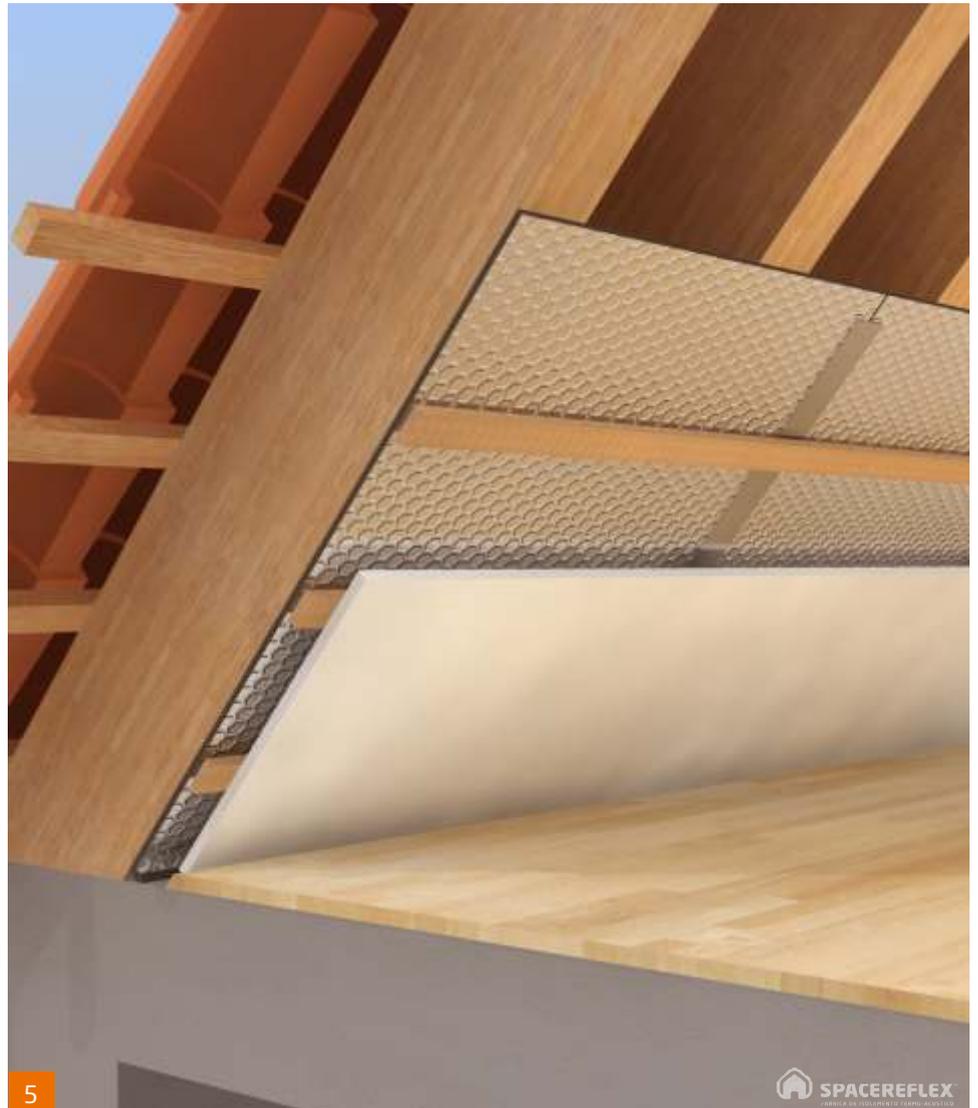

1
Support.

2
Place the insulation.

3
To maintain the continuity of the product,
add rolls overlapped with distances of 10
cm and sealed with aluminum tape.

4
Place the support for the drywall.

5
Apply the drywall.